




## How to **IMPROVE THE PERFORMANCE** of a **TB10 ELP** with **50 to 55 Deg.** hot water supply

### **FIT A 14T KIT**

**Step1** - Remove Cold valve (opposite to outlet) and replace with **14T Valve**.

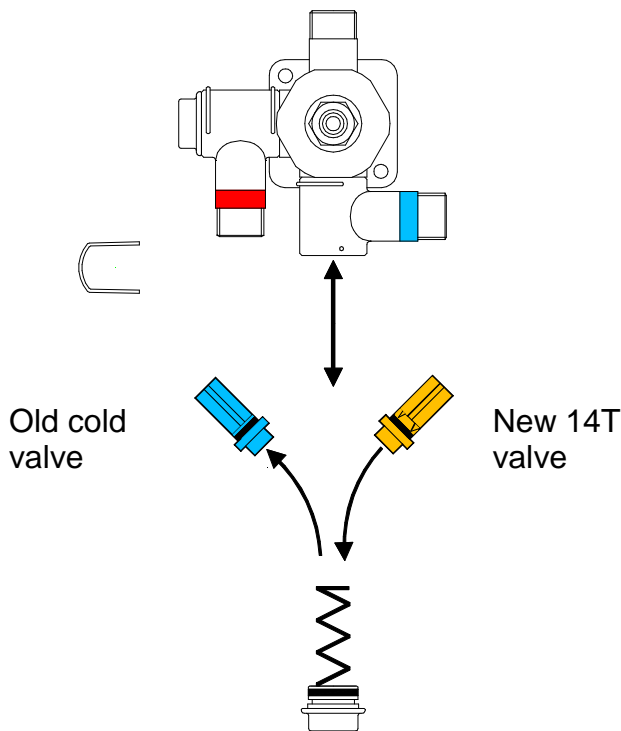

**Note:**

*High pressure systems fitted with TB10 EHP valves require no alteration.*

**Step2**

